

Product Code




VR205

Product Description

An architectural recessed spotlight with a deep-set light source, providing controlled and glare-reduced illumination. It is used for accent and supportive lighting in residential, office, and commercial interiors.


Specifications

Inch	2"	3"	4"	6"	8"
Watt	8W	12W	15W	30W	40W
Current	200	250	350	700	900
Luminous Flux	965	1295	1750	3640	4537
CRI	80	80	80	80	80
IP Class	20-44	20-44	20-44	20-44	20-44
Diameter (A)	108mm	128mm	150mm	200mm	240mm
Cut Out (B)	90mm	105mm	130mm	180mm	210mm
Depth (C)	70mm	55mm	58mm	58mm	58mm

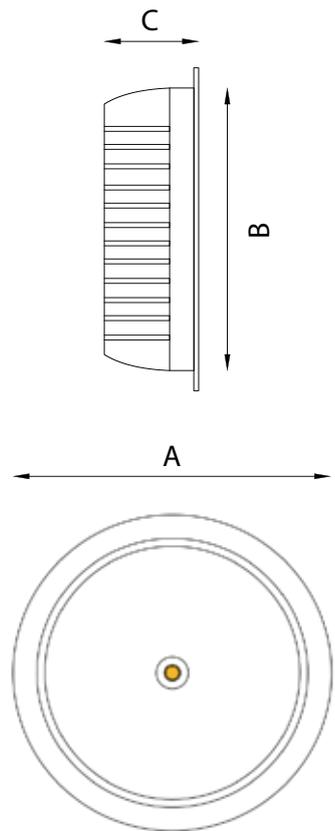

Light Angle	36°
Color Temperature	2700K / 3000K / 4000K / 6500K
Case Color	RAL (Colors)
COB LED	TRIDONIC SAMSUNG OSRAM
DRIVER	TRIDONIC EAGLE RISE OSRAM PHILIPS

Light Distribution



Aluminium Injection Body	Compatible Driver with DALI
Electrostatic Powder Coated	Compatible with Emergency Kit
Heat Resistant Glass	