



Product Code



VR216

Product Description


An architectural recessed downlight with a large diameter, delivering effective general lighting in high-ceiling spaces. It is suitable for large-volume interiors.

Specifications

Watt	20W	30W	40W
Current	600	700	900
Input Voltage	220-240V	220-240V	220-240V
Luminous Flux	3450Lm	4060Lm	5060Lm
IP Class	20-44	20-44	20-44
CRI	80	80	80
Light Angle	24° - 40°- 60°		
Color Temperature	2700K / 3000K / 4000K / 6500K		
Case Color	RAL (Colors)		
COB LED	TRIDONIC SAMSUNG OSRAM		
DRIVER	TRIDONIC EAGLE RISE OSRAM PHILIPS		

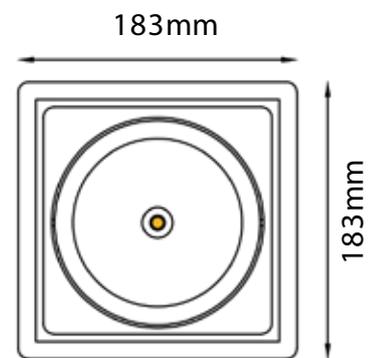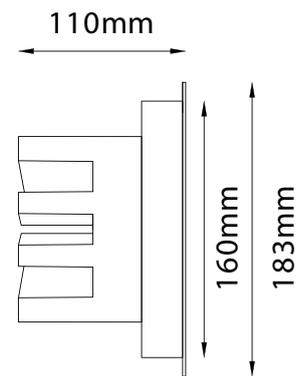

Light Distribution

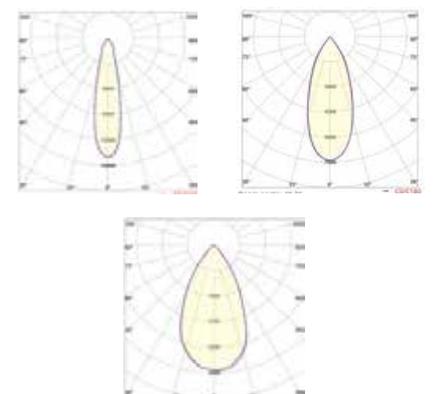

Aluminium Injection Body

Compatible Driver with DALI

Electrostatic Powder Coated

Compatible with Emergency Kit

Heat Resistant Glass