



Product Code

VR222

Product Description

An architectural recessed spotlight available in single and double configurations, allowing flexible lighting scenarios. It is used for corridors, display areas, and accent lighting.

Specifications

Watt	8W
Current	200
Input Voltage	220-240V
Luminous Flux	980Lm
CRI	80
IP Class	20-44
Light Angle	24° - 40° - 60°
Color Temperature	2700K / 3000K 4000K / 6500K
Case Color	RAL (Colors)

COB LED **TRIDONIC SAMSUNG OSRAM**

DRIVER **TRIDONIC EAGLE RISE OSRAM PHILIPS**

Aluminium Injection Body


Compatible Driver with DALI

Electrostatic Powder Coated


Compatible with Emergency Kit

Heat Resistant Glass

75mm

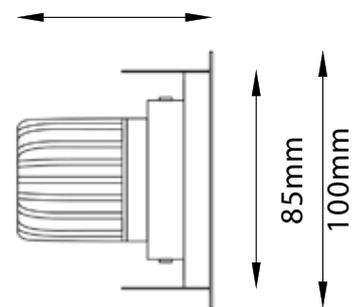

100mm

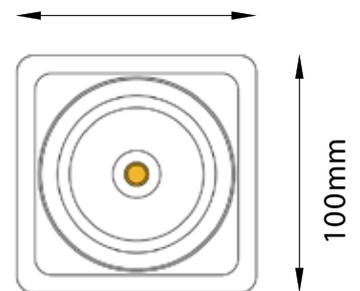

Light Distribution

