

Product Code

VR228

Product Description

Designed to be integrated into baffle ceiling systems, this recessed lighting solution provides focused, point-source illumination. It delivers balanced and controlled light distribution within a space. Suitable for offices and educational environments.

Specifications

Watt	8W
Current	200
Input Voltage	220-240V
Luminous Flux	980Lm
CRI	80
IP Class	20-44
Light Angle	24° - 40° - 60°
Color Temperature	2700K / 3000K 4000K / 6500K
Case Color	RAL (Colors)
COB LED	TRIDONIC SAMSUNG OSRAM
DRIVER	TRIDONIC EAGLE RISE OSRAM PHILIPS


Aluminium Injection Body

Compatible Driver with DALI

Electrostatic Powder Coated

Compatible with Emergency Kit

Heat Resistant Glass

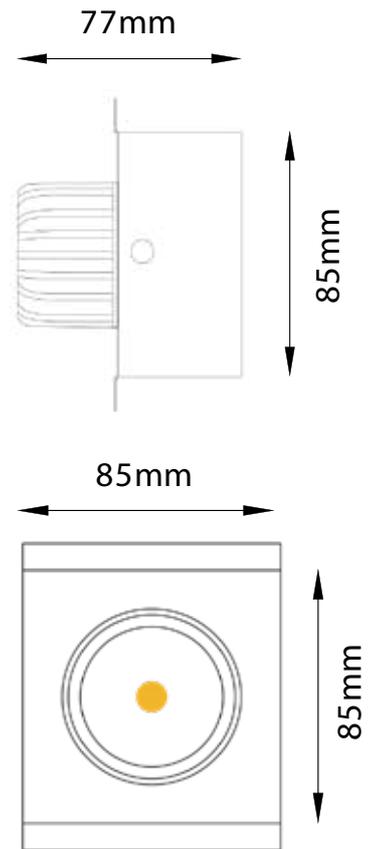

Light Distribution

