



Product Code

VR402

Product Description

An architectural linear lighting solution with an aluminum profile, providing continuous and balanced illumination. It is used for general lighting in offices, corridors, and shared spaces.

Specifications

Lenght (L)	120cm	150cm
Watt	38W	48W
Input Voltage	220-240V	220-240V
Luminous Flex	3990Lm	5040Lm
CRI	80	80
IP Class	40	40

Light Angle	120°
-------------	------

Color Temperature	2700K / 3000K 4000K / 6500K
-------------------	--------------------------------

Case Color	RAL (Colors)
------------	--------------



SMD LED	SAMSUNG OSRAM
---------	----------------------

DRIVER	TRIDONIC EAGLE RISE OSRAM PHILIPS
--------	--

Aluminium Injection Body	Compatible Driver with DALI
--------------------------	-----------------------------

Electrostatic Powder Coated	Compatible With Emergency Kit
-----------------------------	-------------------------------

Heat Resistant Glass	As Pendant or Surface Mounted
----------------------	-------------------------------

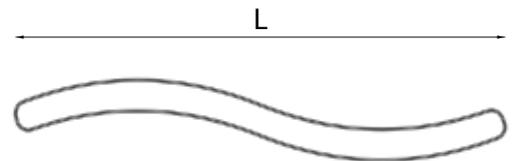

Light Distrubition

