

Product Code

VR410

Product Description



A ring-shaped architectural linear luminaire creating a strong visual presence in space. It is used for general lighting and focal points in lobbies, offices, and commercial interiors.

Specifications

Diameter (∅)	400mm	600mm	800mm	1000mm	1200mm
Watt	30W	45W	60W	75W	85W
Input Voltage	220-240V	220-240V	220-240V	220-240V	220-240V
Luminous Flux	3150Lm	4725Lm	6300Lm	7875Lm	8925Lm
CRI	80	80	80	80	80
IP Class	40	40	40	40	40w

Light Angle	120°
Length (A)	45mm / 80mm
Color Temperature	2700K / 3000K 4000K / 6500K
Case Color	RAL (Colors)
SMD LED	SAMSUNG OSRAM OSRAM PHILIPS
DRIVER	TRIDONIC EAGLERISE

Aluminium Injection Body	Compatible Driver with DALI
Electrostatic Powder Coated	Compatible With Emergency Kit
Heat Resistant Glass	As Pendant or Surface Mounted

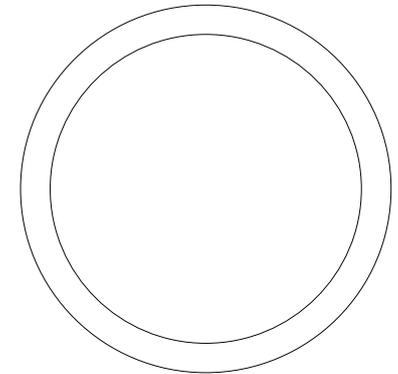

Light Distribution

